


TL-64 DVB-S SD MPEG-2 Set-Top-Box

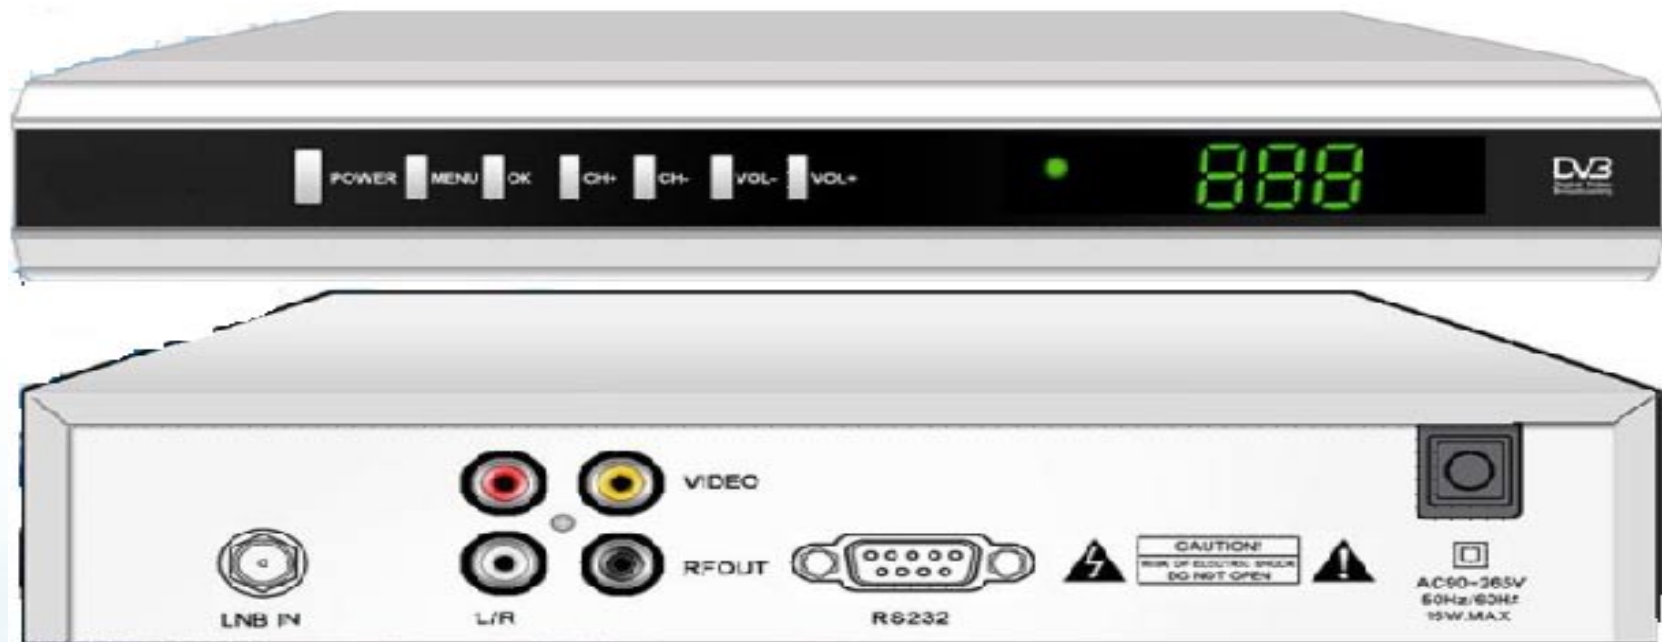

DVB-S SD MPEG-2:

SOLUTION 1: ALI3328F+CE5039/RDA5812/AV2026

Support up to 1000 TPS, 2500 channels.

RF modulator (CH21-CH69)

256 colors on screen display OSD

SOLUTION 2: GX6101D+RDA5812/AV2026

Support up to 3000 TPS, 5000 channels

16:9 wide screen, 4:3 letter box, 4:3 pan scan

FEATURES

Fully DVB-S MPEG2 compliant

950-2150MHz input frequency .2-45Mb/s symbol rate.

22k Tone. Diseqc1.0, 1.2 support

Automatic blind scan
3 operation mode (Digital TV, Digital Radio, Favorite)
Scart video output
RF out .channel 11
Up to 9 pictures on screen
Multi-language, default English
Automatic PAL/NTSC conversion
Software upgrade through RS232

SOLUTION 3: ALI3329D+CE5039

Support up to 1000 TPS, 2500 channels.
Support Telecast CAS
Up to 9 pictures on screen

SOLUTION 4: GX6108+RDA5812

Support up to 2000 TPS, 5000 channels
Support Telecast CAS
Time shift function
Up to 16 picture on screen most.
Timer function support-wakeup time

SOLUTION 5: SUNPLUS1002A+SP6610+CE5039

Support up to 2000 TPS, 2000 channels
Timer function support-wakeup time
Native 32 Games.

FEATURES

Fully DVB-S MPEG2 compliant
950-2150MHz input frequency .2-45Mb/s symbol rate.
22k Tone. Diseq1.0, 1.2 support
Automatic blind scan
USB 2.0 for PVR Media Player & Software update
Disk manager

3 operation mode (Digital TV, Digital Radio, Favorite)

256 colors on screen display OSD

Scart video output

RF out .channel 11

RF MODULATOR(CH21-CH69)

SPDIF OUT

Electronic Program Guide(EPG)

Teletext and subtitle support

Multi-language, default English

Automatic PAL/NTSC conversion.

SOLUTION 6:ALI3329+CE5039/RDA5812

Support up to 1000 TPS. 2500 channels.

BISS function

Twin Protocol function

256 colors on screen display OSD

RF Modulator(CH21-CH69)

SOLUTION 7:GX6101+RDA5812

Support up to 3000 TPS, 5000 channels

BISS function

Twin Protocol function

16:9 wide screen, 4:3 letter box, 4:3 pan scan.

SOLUTION 8:ALI3329C+CE5039

Support up to 1000 TPS, 2500 channels

Electronic Program Guide(EPG)

Teletext and subtitle support

Support Telecast CAS

RF Modulator(CH21-CH69)

16:9 wide screen, 4:3 letter box, 4:3 pan scan.

256 colors on screen display OSD

FEATURES

Fully DVB-S MPEG2 compliant
950-2150MHz input frequency .2-45Mb/s symbol rate.
22k Tone.Diseqc1.0,1.2 support
Automatic blind scan
3 operation mode(Digital TV,Digital Radio,Favorite)
Scart video output
RF out channel 11
Up to 9 pictures on screen
Multi-language.default English
Automatic PAL/NTSC conversion
Software upgrade through RS232
OTA function



Overview:

Internet Receiver
MultiCard



Features:

Internet Receiver
MultiCard
Fully DVB-S & MPEG-2 compliant
3000 channels TV & Radio
DISEQC1.2, DISEQC 1.0, TONE (22KHZ) and LNB Switching support
SCPC & MCPC receivable from C/Ku-Band satellite
3 operation mode(Digital TV,Digital Radio,Favorite)
950-2150MHz input frequency.

wide symbol rate 1-45mbps

easy graphic menu interface

5 OSD color style

PAL-NTSC auto-conversion.

Up to 9 picture on screen

Software upgrade through RS-232 Serial Port

DVB-S (GX6102D)

CPU:GX6102D

RAM:64M

ROM:8M

